

Quad Driver

UT54LVDS031

Features

- >155.5 Mbps (77.7 MHz) switching rates
- $\pm 340\text{mV}$ nominal differential signaling
- 5 V power supply
- TTL compatible inputs
- Ultra low power CMOS technology
- 5.0ns maximum, propagation delay
- 3.0ns maximum, differential skew
- Operational environment: total dose irradiation testing to MIL- STD-883 Method 1019
 - Total-dose: 300 krad(Si) and 1Mrad(Si)
 - Latchup immune ($\text{LET} \leq 100 \text{ MeV}\cdot\text{cm}^2/\text{mg}$)
- Packaging options:
 - 16-lead flatpack (0.7 grams)
- Standard Microcircuit Drawing 5962-95833
 - QML Q and V compliant part
- Compatible with IEEE 1596.3SCI LVDS
- Compatible with ANSI/TIA/EIA 644-1996 LVDS Standard

Introduction

The UT54LVDS031 Quad Driver is a quad CMOS differential line driver designed for applications requiring ultra low power dissipation and high data rates. The device is designed to support data rates in excess of 155.5 Mbps (77.7 MHz) utilizing Low Voltage Differential Signaling (LVDS) technology.

The UT54LVDS031 accepts TTL input levels and translates them to low voltage (340mV) differential output signals. In addition, the driver supports a three-state function that may be used to disable the output stage, disabling the load current, and thus dropping the device to an ultra low idle power state.

The UT54LVDS031 and companion quad line receiver UT54LVDS032 provide new alternatives to high power pseudo-ECL devices for high speed point-to-point interface applications.

UT54LVDS031

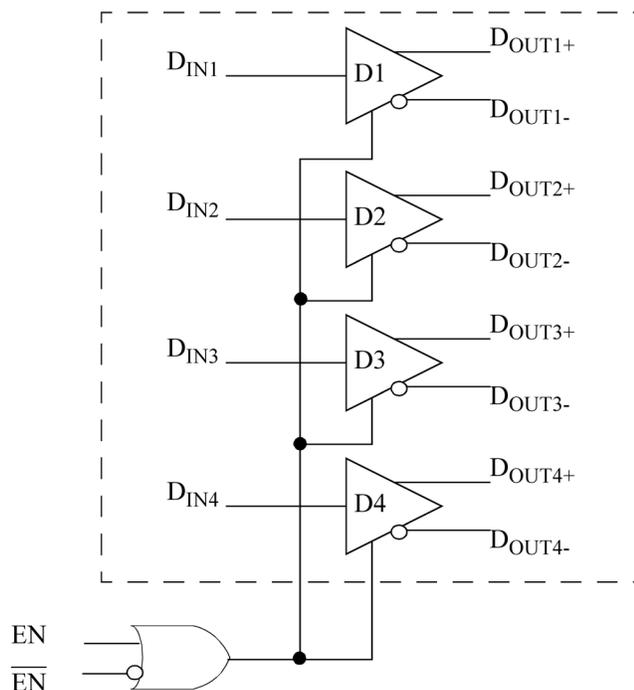


Figure 1. UT54LVDS031 Quad Driver Block Diagram

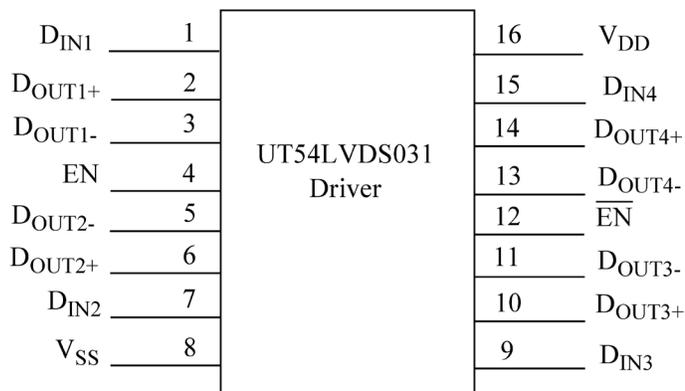


Figure 2. UT54LVDS031 Pinout

Truth Table

Enables		Input	Output	
EN	\overline{EN}	D_{IN}	D_{OUT+}	D_{OUT-}
L	H	X	Z	Z
All other combinations of ENABLE inputs		L	L	H
		H	H	L

UT54LVDS031

Pin Description

Pin No.	Name	Description
1, 7, 9, 15	D _{IN}	Driver input pin, TTL/CMOS compatible
2, 6, 10, 14	D _{OUT+}	Non-inverting driver output pin, LVDS levels
3, 5, 11, 13	D _{OUT-}	Inverting driver output pin, LVDS levels
4	EN	Active high enable pin, OR-ed with $\overline{\text{EN}}$
12	$\overline{\text{EN}}$	Active low enable pin, OR-ed with EN
16	V _{DD}	Power supply pin, +5V ± 10%
8	V _{SS}	Ground pin

Applications Information

The UT54LVDS031 driver's intended use is primarily in an uncomplicated point-to-point configuration as is shown in Figure 3. This configuration provides a clean signaling environment for quick edge rates of the drivers. The receiver is connected to the driver through a balanced media such as a standard twisted pair cable, a parallel pair cable, or simply PCB traces. Typically, the characteristic impedance of the media is in the range of 100Ω. A termination resistor of 100Ω should be selected to match the media and is located as close to the receiver input pins as possible. The termination resistor converts the current sourced by the driver into voltages that are detected by the receiver. Other configurations are possible such as a multi-receiver configuration, but the effects of a mid-stream connector(s), cable stub(s), and other impedance discontinuities, as well as ground shifting, noise margin limits, and total termination loading must be taken into account.

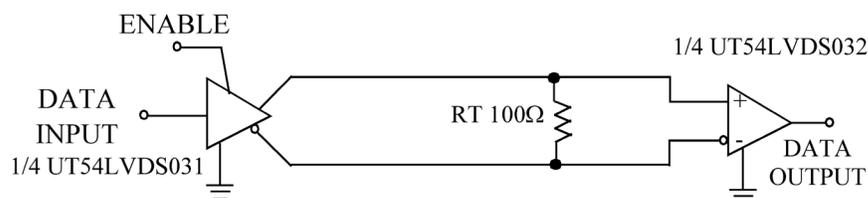


Figure 3. Point-To-Point Application

The UT54LVDS031 differential line driver is a balanced current source design. A current mode driver, has a high output impedance and supplies a constant current for a range of loads (a voltage mode driver on the other hand supplies a constant voltage for a range of loads). Current is switched through the load in one direction to produce a logic state and in the other direction to produce the other logic state. The current mode **requires** (as discussed above) that a resistive termination be employed to terminate the signal and to complete the loop as shown in Figure 3. AC or unterminated configurations are not allowed. The 3.4mA loop current will develop a differential voltage of 340mV across the 100Ω termination resistor which the receiver detects with a 240mV minimum differential noise margin neglecting resistive line losses (driven signal minus receiver threshold (340mV - 100mV = 240mV)). The signal is centered around +1.2V (Driver Offset, V_{OS}) with respect to ground as shown in Figure 4. **Note:** The steady-state voltage (V_{SS}) peak-to-peak swing is twice the differential voltage (V_{OD}) and is typically 680mV.

UT54LVDS031

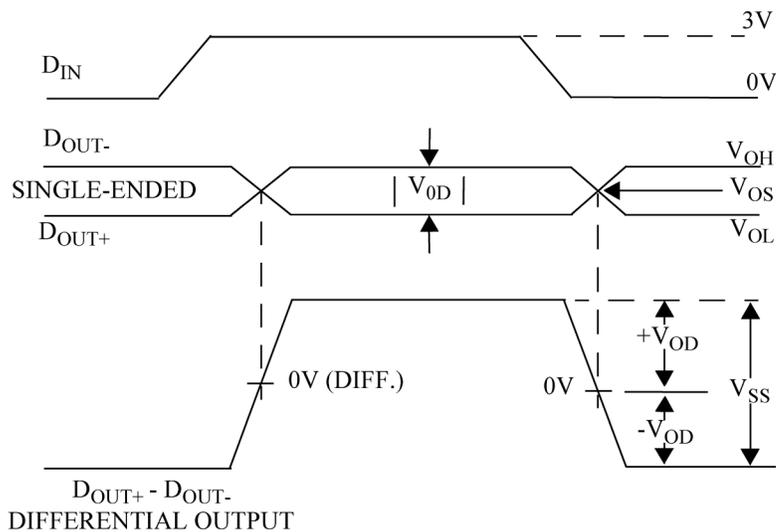


Figure 4. Driver Output Levels

Note:

- 1) The footprint of the UT54LVDS031 is the same as the industry standard Quad Differential (RS-422) Driver.

The current mode driver provides substantial benefits over voltage mode drivers, such as an RS-422 driver. Its quiescent current remains relatively flat versus switching frequency. Whereas the RS-422 voltage mode driver increases exponentially in most cases between 20 MHz - 50 MHz. This is due to the overlap current that flows between the rails of the device when the internal gates switch. Whereas the current mode driver switches a fixed current between its output without any substantial overlap current. This is similar to some ECL and PECL devices, but without the heavy static I_{CC} requirements of the ECL/PECL design. LVDS requires 80% less current than similar PECL devices. AC specifications for the driver are a tenfold improvement over other existing RS-422 drivers.

The Three-State function allows the driver outputs to be disabled, thus obtaining an even lower power state when the transmission of data is not required.

Operational Environment

Parameter	Limit	Units
Total Ionizing Dose (TID)	1.0E6	rad(Si)
Single Event Latchup (SEL)	≤ 100	MeV-cm ² /mg
Neutron Fluence ¹	1.0E13	n/cm ²

Note:

- 1) Guaranteed but not tested.

UT54LVDS031

Absolute Maximum Ratings¹

(Referenced to V_{SS})

Symbol	Parameter	Limit
V_{DD}	DC supply voltage	-0.3 to 6.0V
$V_{I/O}$	Voltage on any pin	-0.3 to ($V_{DD} + 0.3V$)
ESD_{HBM}	HBM ESD Rating	500V
T_{STG}	Storage temperature	-65 to +150°C
P_D	Maximum power dissipation	1.25 W
T_J	Maximum junction temperature ²	+150°C
Θ_{JC}	Thermal resistance, junction-to-case ³	10°C/W
I_I	DC input current	±10mA

Notes:

- 1) Stresses outside the listed absolute maximum ratings may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other condition beyond limits indicated in the operational sections of this specification is not recommended. Exposure to absolute maximum rating conditions for extended periods may affect device reliability and performance.
- 2) Maximum junction temperature may be increased to +175°C during burn-in and steady-static life.
- 3) Test per MIL-STD-883, Method 1012.

Recommended Operating Conditions

Symbol	Parameter	Typical
V_{DD}	Positive supply voltage	4.5 to 5.5V
T_C	Case temperature range	-55 to +125°C
V_{IN}	DC input voltage	0V to V_{DD}

UT54LVDS031

DC Electrical Characteristics* 1, 2

($V_{DD} = 5.0V \pm 10\%$; $-55^{\circ}C < T_c < +125^{\circ}C$); Unless otherwise noted, T_c is per the temperature range ordered

Symbol	Parameter	Condition	MIN	MAX	Unit
V_{IH}	High-level input voltage	(TTL)	2.0	V_{DD}	V
V_{IL}	Low-level input voltage	(TTL)	V_{SS}	0.8	V
V_{OL}	Low-level output voltage	$R_L = 100\Omega$	0.90		V
V_{OH}	High-level output voltage	$R_L = 100\Omega$		1.60	V
I_{IN}^4	Input leakage current	$V_{IN} = V_{DD}$	-10	+10	μA
V_{OD}^1	Differential Output Voltage	$R_L = 100\Omega$ (figure 5)	250	400	mV
ΔV_{OD}^1	Change in Magnitude of V_{OD} for Complementary Output States	$R_L = 100\Omega$ (figure 5)		10	mV
V_{OS}	Offset Voltage	$R_L = 100\Omega, (V_{OS} = \frac{V_{OH} + V_{OL}}{2})$	1.125	1.375	V
ΔV_{OS}	Change in Magnitude of V_{OS} for Complementary Output States	$R_L = 100\Omega$ (figure 5)		25	mV
V_{CL}^3	Input clamp voltage	$I_{CL} = -18mA$		-1.5	V
I_{OS}^3	Output Short Circuit Current	$V_{OUT} = 0V^2$		5.0	mA
I_{OZ}^4	Output Three-State Current	$EN = 0.8V$ and $\overline{EN} = 2.0 V$, $V_{OUT} = 0V$ or V_{DD}	-10	+10	μA
I_{CCL}^4	Loaded supply current drivers enabled	$R_L = 100\Omega$ all channels $V_{IN} = V_{DD}$ or V_{SS} (all inputs)		25.0	mA
I_{CCZ}^4	Loaded supply current drivers disabled	$D_{IN} = V_{DD}$ or V_{SS} $EN = V_{SS}, \overline{EN} = V_{DD}$		10.0	mA

Notes:

*For devices procured with a total ionizing dose tolerance guarantee, the post-irradiation performance is guaranteed at 25°C per MIL-STD-883 Method 1019, Condition A up to the maximum TID level procured.

- 1) Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground except differential voltages.
- 2) Output short circuit current (I_{OS}) is specified as magnitude only, minus sign indicates direction only.
- 3) Guaranteed by characterization.
- 4) Device are tested @ $V_{DD} = 5.5V$ only.

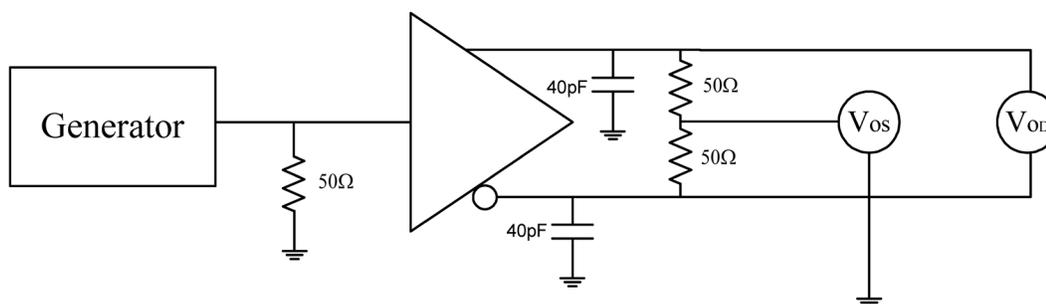


Figure 5. Driver V_{OD} and V_{OS} Test Circuit or Equivalent Circuit

UT54LVDS031

AC Switching Characteristics* 1, 2, 3, 4

($V_{DD} = +5.0V \pm 10\%$, $T_C = -55^\circ C$ to $+125^\circ C$); Unless otherwise noted, T_C is per the temperature range ordered

Symbol	Parameter	Minimum	Maximum	Unit
t_{PHLD}	Differential Propagation Delay High to Low (figures 6 and 7)	0.5	5.0	ns
t_{PLHD}	Differential Propagation Delay Low to High (figures 6 and 7)	0.5	5.0	ns
t_{SKD} ⁴	Differential Skew ($t_{PHLD} - t_{PLHD}$) (figures 6 and 7)	0	3.0	ns
t_{SKL} ⁴	Channel-to-Channel Skew ¹ (figures 6 and 7)	0	3.0	ns
t_{SK2} ⁴	Chip-to-Chip Skew ⁵ (figure 6 and 7)		4.5	ns
t_{TLH} ⁴	Rise Time (figures 6 and 7)		2.0	ns
t_{THL} ⁴	Fall Time (figures 6 and 7)		2.0	ns
t_{PHZ} ⁴	Disable Time High to Z (figures 8 and 9)		10	ns
t_{PLZ} ⁴	Disable Time Low to Z (figures 8 and 9)		10	ns
t_{PZH} ⁴	Enable Time Z to High (figures 8 and 9)		10	ns
t_{PZL} ⁴	Enable Time Z to Low (figures 8 and 9)		10	ns

Notes:

*For devices procured with a total ionizing dose tolerance guarantee, the post-irradiation performance is guaranteed at 25°C per MIL-STD-883 Method 1019, Condition A up to the maximum TID level procured.

- 1) Channel-to-Channel Skew is defined as the difference between the propagation delay of the channel and the other channels in the same chip with an event on the inputs.
- 2) Generator waveform for all tests unless otherwise specified: $f = 1$ MHz, $Z_o = 50$, $t_r \leq 6$ ns, and $t_f \leq 6$ ns.
- 3) C_L includes probe and jig capacitance.
- 4) Guaranteed by characterization.
- 5) Chip to Chip Skew is defined as the difference between the minimum and maximum specified differential propagation delays.

UT54LVDS031

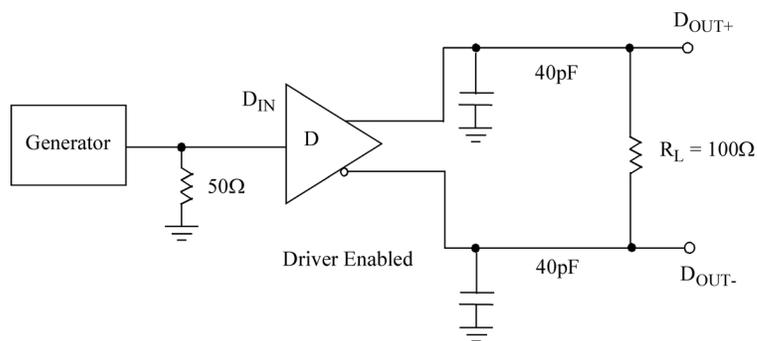


Figure 6. Driver Propagation Delay and Transition Time Test Circuit or Equivalent Circuit

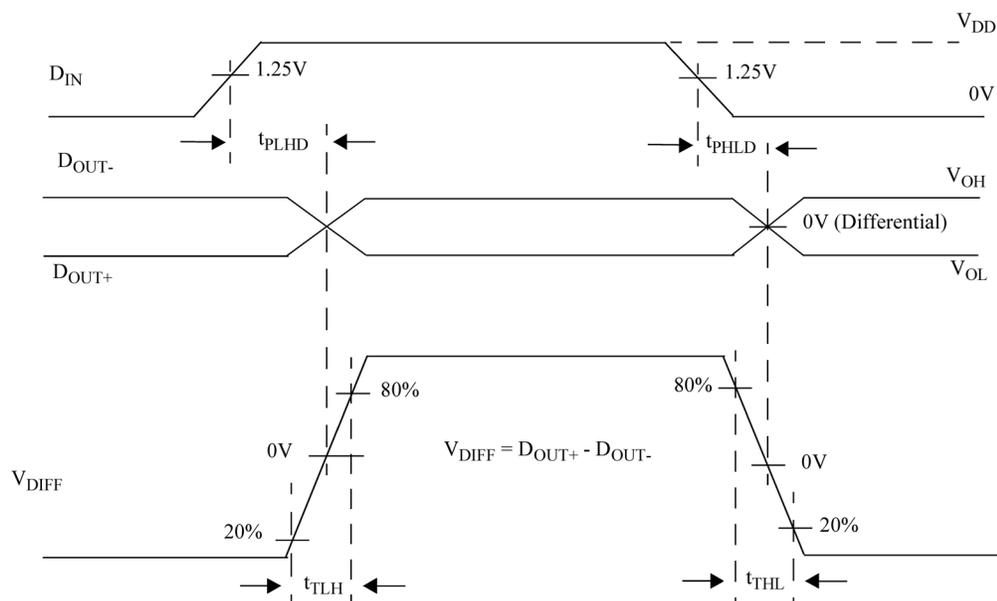


Figure 7. Driver Propagation Delay and Transition Time Waveforms

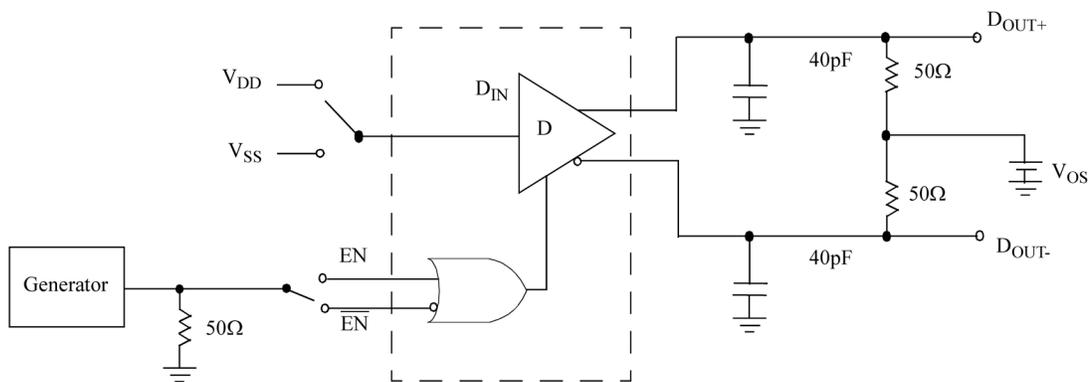


Figure 8. Driver Three-State Delay Test Circuit or Equivalent Circuit

UT54LVDS031


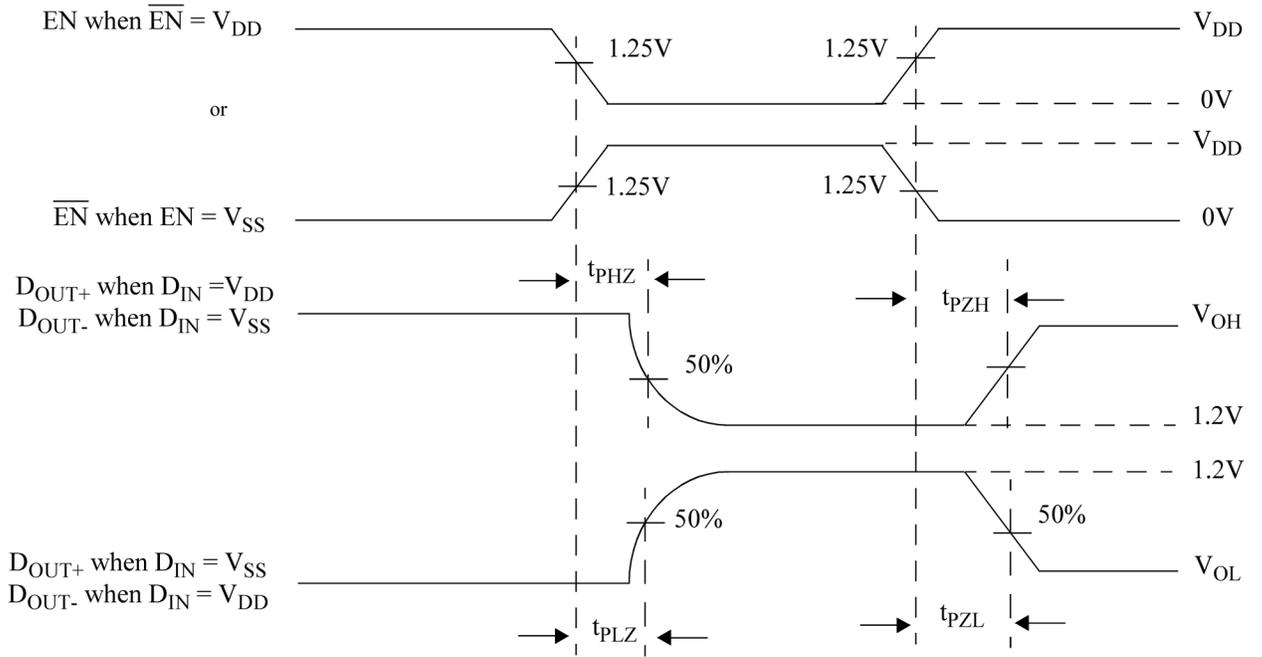


Figure 9. Driver Three-State Delay Waveform

UT54LVDS031

Packaging

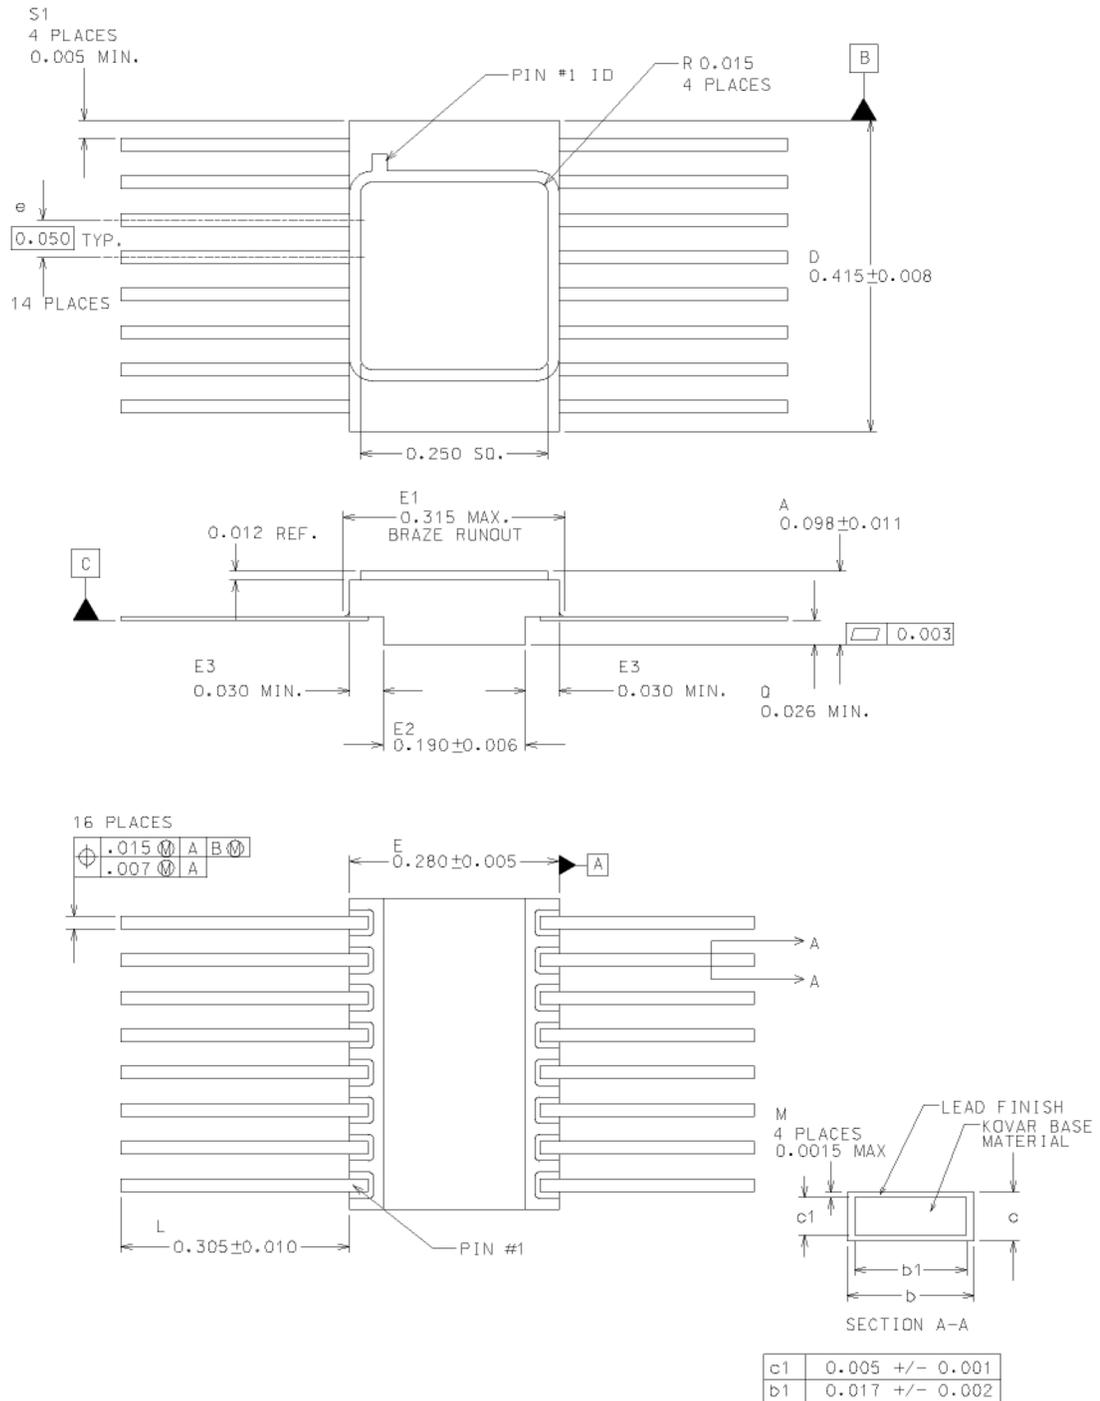

Notes:

- 1) All exposed metalized areas must be gold plated over electrically plated nickel per MIL-PRF-38535.
- 2) The Lid is electrically connected to VSS.
- 3) Lead finishes are in accordance to MIL-PRF-38535.
- 4) Dimensions symbology is in accordance with MIL-STD-1835.
- 5) Lead position and coplanarity are not measured

UT54LVDS031

Ordering Information

UT54LVDS031 Quad Driver:

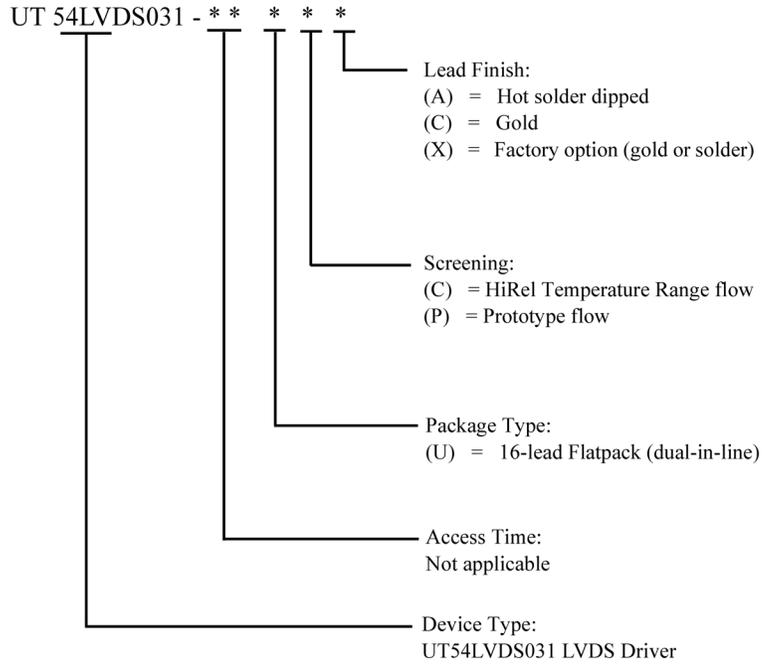



Figure 10. 16-pin Ceramic Flatpack

Notes:

- 1) Lead finish (A,C, or X) must be specified.
- 2) If an "X" is specified when ordering, then the part marking will match the lead finish and will be either "A" (solder) or "C" (gold).
- 3) Prototype flow per CAES Colorado Springs Manufacturing Flows Document. Tested at 25°C only. Lead finish is GOLD ONLY. Radiation neither tested nor guaranteed.
- 4) HiRel Temperature Range flow per CAES Colorado Springs Manufacturing Flows Document. Devices are tested at -55°C, room temp, and 125°C. Radiation neither tested nor guaranteed.

UT54LVDS031

UT54LVDS031 Quad Driver: SMD

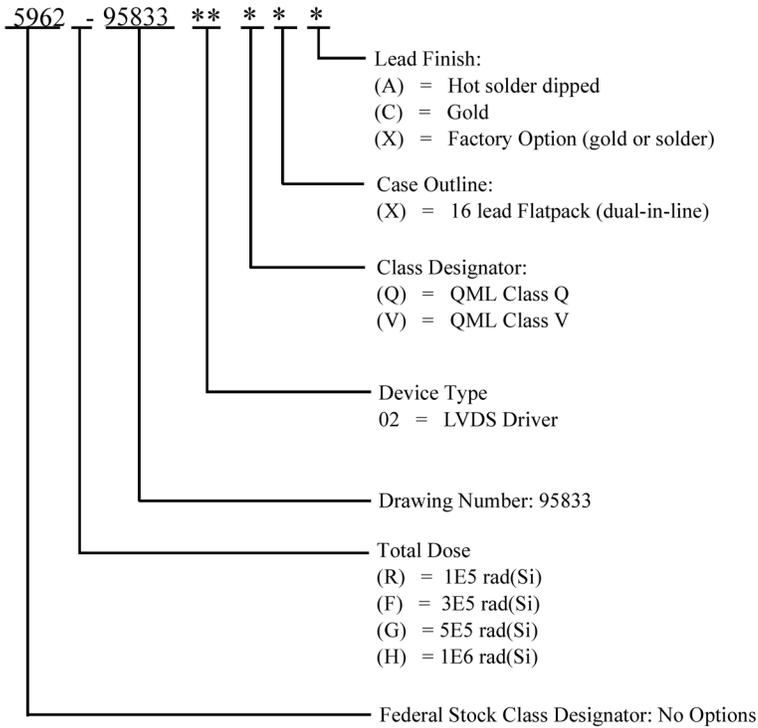

Notes:

- 1) Lead finish (A, C, or X) must be specified.
- 2) If an "X" is specified when ordering, part marking will match the lead finish and will be either "A" (solder) or "C" (gold).
- 3) Total dose radiation must be specified when ordering. QML Q and QML V not available without radiation hardening.

Datasheet Revision History

Rev	Revision Date	Description of Change	Author
1.0.0	9-12	Last official release	MM
1.0.1	9-17-15	Page 1, added package weight. Applied new CAES Data Sheet template to the document.	MM
1.0.2	8-16-21	Added HBM ESD Rating: AMR Table, p.5	BM
1.0.3	9-22-21	SEL Limit sign, p.1, 4	BM

UT54LVDS031

Datasheet Definitions

	DEFINITION
Advanced Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is still in the development stage and the datasheet is subject to change . Specifications can be TBD and the part package and pinout are not final .
Preliminary Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is in the characterization stage and prototypes are available.
Datasheet	Product is in production and any changes to the product and services described herein will follow a formal customer notification process for form, fit or function changes.

The following United States (U.S.) Department of Commerce statement shall be applicable if these commodities, technology, or software are exported from the U.S.: These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

Cobham Colorado Springs Inc. d/b/a Cobham Advanced Electronic Solutions (CAES) reserves the right to make changes to any products and services described herein at any time without notice. Consult an authorized sales representative to verify that the information in this data sheet is current before using this product. The company does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing; nor does the purchase, lease, or use of a product or service convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of the company or of third parties.